

6

5

4

3


2

1

MATERIAL  
NUMBERENGINEERING  
NUMBER

1300550001

ENSP1F5

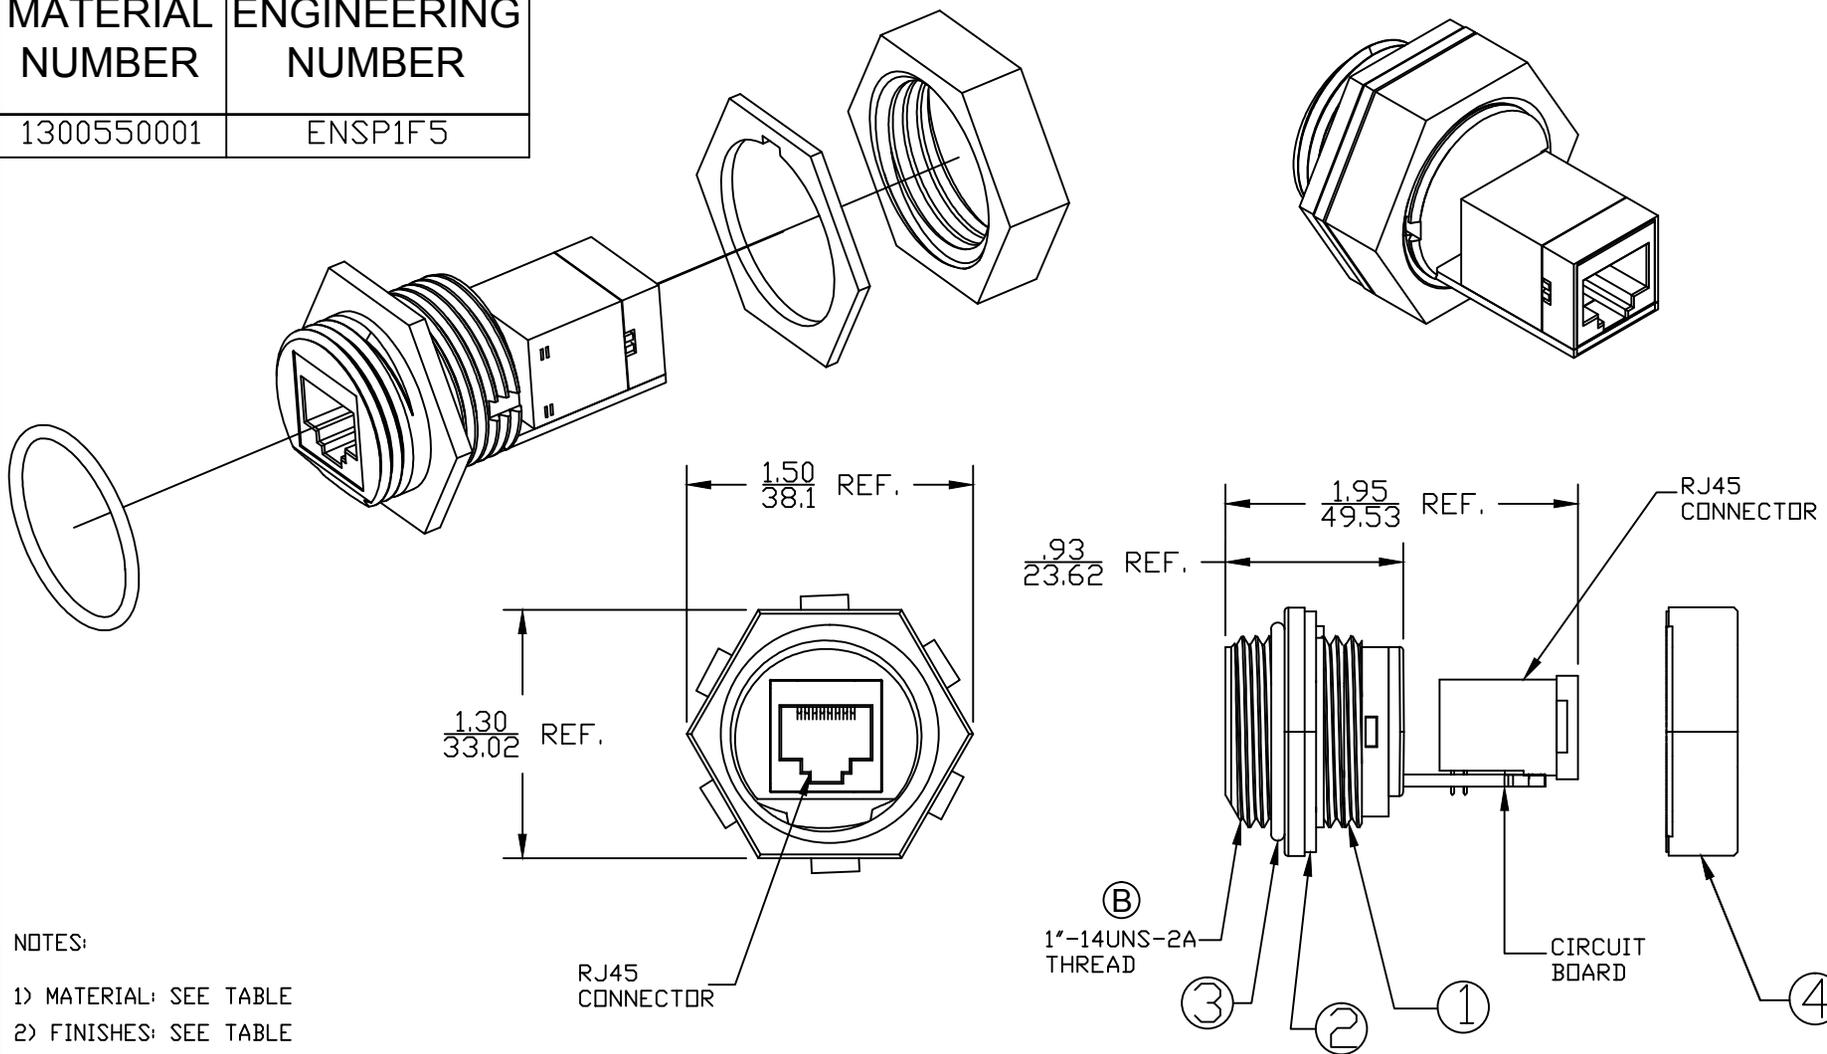

## NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) ELECTRICAL DATA:  
VOLTAGE RATING: 125V DC  
CURRENT RATING: 1.5A
- 4) ENVIRONMENTAL:  
PROTECTION IP67  
OPERATING TEMPERATURE RANGE: -20C TO 80C

\*THIS DOCUMENT SUPERSEDES SD-130055-001

CORRECT THREAD				QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
4	1	LOCK NUT	LNP, AF-1002BK8-115	BLACK	mm	INCH			
3	1	O-RING	VITON	BROWN	4 PLACES	±---	±---		
2	1	GASKET	NITRILE	BLACK	3 PLACES	±---	±.005		
1	1	RECEPTACLE HOUSING	SABIC ABS FR15U	BLACK	2 PLACES	±0.13	±0.10		
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH	1 PLACE	±0.25	±0.020		
EC NO: IPC2016-1503 DRWN: MZIELINS 2016/05/18 CHKD: VOU 2016/05/19 APPR: BWOODMAN 2016/05/09					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION STYLE IN/MM DRAWN BY DATE MZIELINS 2016/04/26		TITLE ETHERNET PASS THRU RJ45 RJ45 FEMALE RECEPTACLE SHIELDED PASS THRU
CORRECT THREAD EC NO: IPC2016-1503 DRWN: MZIELINS 2016/05/18 CHKD: VOU 2016/05/19 APPR: BWOODMAN 2016/05/09					ANGULAR ±1/2°		CHECKED BY DATE VOU 2016/05/01		MOLEX INCORPORATED
REV B					MATERIAL NO.		APPROVED BY DATE BWOODMAN 2016/05/09		SHEET NO. 1 OF 1
					SEE CHART		DOCUMENT NO. SD-130055-017		
					SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6

5

4

3

2

1